

MTN-AL50

Intel® Alder Lake-P Series Processor based Ultra-Compact Mini PC with Dual Displays



Features

- CPU: 12th Gen Intel® Alder Lake-P Processors
- Memory: Dual Channel SO-DIMM DDR5 Up to 64GB
- Display: Intel® Integrated Graphics, Display via 2x HDMI2.0+DisplayPort1.4(USB-C)
- I/O Ports: 2xUSB3.2, 2xUSB2.0, 2xLAN(2.5GbE), USB-C, Audio
- Expansion: M.2 for WiFi and Bluetooth
- Storage: SATA3.0, M.2_2280 NVMe SSD
- Power: 19V/20V DC-in



IoT Solutions
Alliance

**Industrial Solution
Builders Specialist**

Maxtang[®]

MAXIMIZING YOUR COMPUTING PRODUCTIVITY

Introduction

The Maxtang MTN-AL50 is a compact mini PC based on the 12th Gen Intel Alder Lake-P series processors, which provides excellent performance with greater space-saving. Supports dual-channel SO-DIMM DDR5 up to 64GB, dual display via Intel Iris Xe Graphics through 2xHDMI2.0 plus DisplayPort 1.4 through USB-C. Features two 10/100/1000/2500 Mbps ethernet controllers, SATA3.0 and M.2 for storage, M.2 Key E for WiFi, and Bluetooth. A rich I/O interface includes 2xUSB3.2, 2xUSB2.0, 2xLAN, 1xUSB-C, Mic-in and Line-out in one with standard 19V/20V DC-in caters to most markets' requirements.

The MTN-AL50 is an ideal solution for various applications. It retains the robust design of all Maxtang product lines at a new cost-effective price point. The powerful features provide the user with an outstanding visual experience and increase productivity with solid performance. Our goal is to provide the best products with high quality and cost advantages.




H/W Monitor



Watchdog



I/O Interfaces

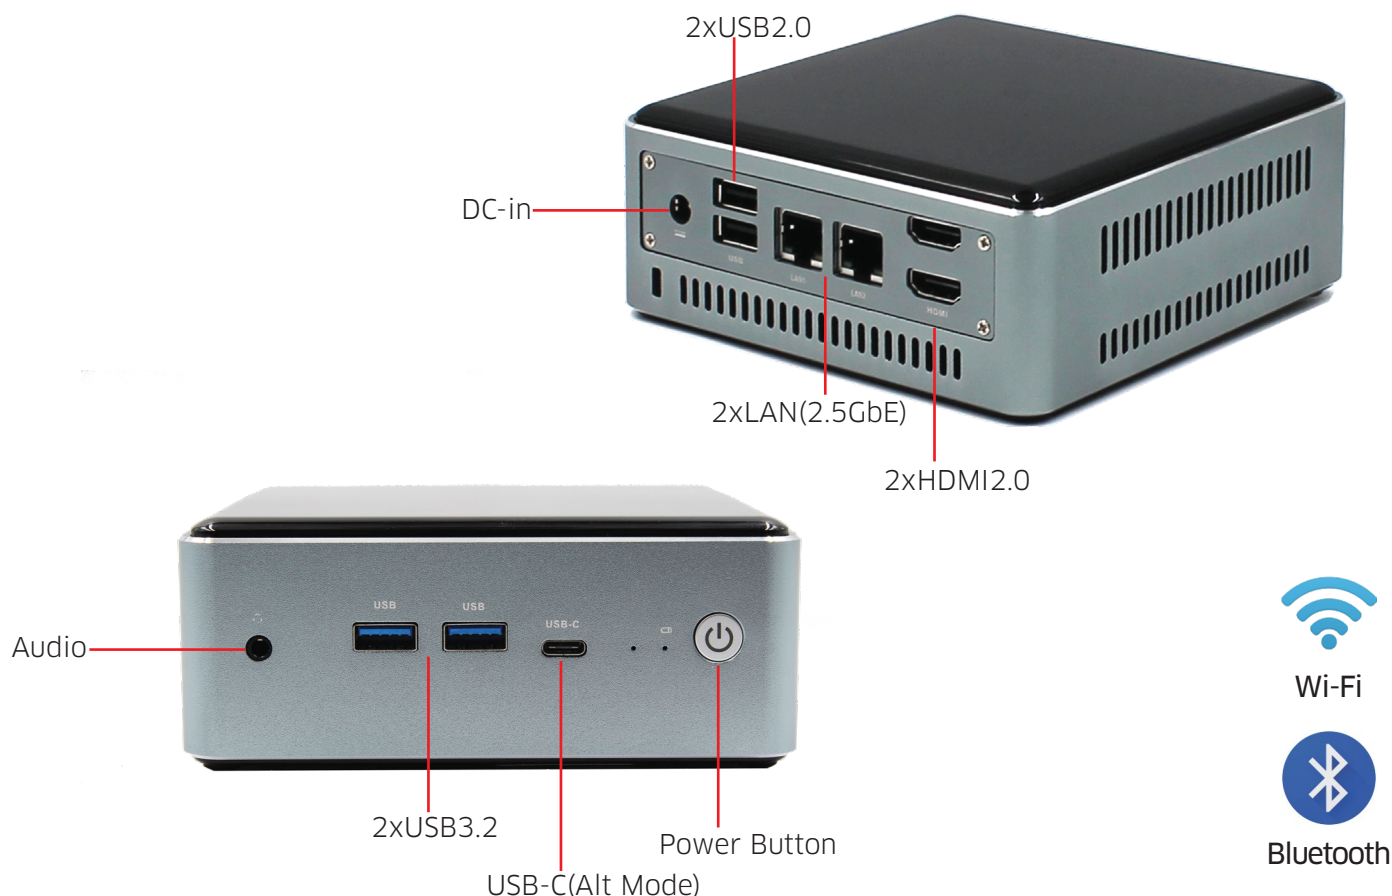


Technical Specifications

Processor	CPU	i7-1260P	i5-1240P
	Total Cores/Threads	12C/16T	12C/16T
	# of Performance-cores	4	4
	# of Efficient-cores	8	8
	P-core Max Turbo Frequency	4.70 GHz	4.40 GHz
	E-core Max Turbo Frequency	3.40 GHz	3.30 GHz
	Cache	18 MB	12 MB
	Processor base Power	28 W	28 W
Memory	Type	Dual Channel SO-DIMM DDR5	
	Max Capacity	64GB	
Display	GPU	Intel Integrated Graphics (Iris Xe/UHD Graphics depends on CPU)	
	Display Interface	2xHDMI2.0 plus DisplayPort 1.4 through USB-C	
Ethernet	Speed	10/100/1000/2500 Mbps	
	Controller	RTL8125	
	Interface	2xRJ-45	
Audio	Audio Codec	Realtek HD	
	Interface	1xCTIA Audio Jack, Supports Line-out+Mic-in	
Hardware		CPU temperature, System temperature, Onboard voltage, Watchdog	
Storage	M.2	1xM.2 for 2280 NVMe SSD, PCIe4.0 4X Signal	
	SATA3.0	1	
Expansion	M.2	1xM.2 for WiFi and Bluetooth, Supports CNVi	
Other I/O	USB2.0	2	
	USB3.2	2	
	USB-C	1xUSB-C Full-functioned	
		Support USB 3.2 Gen 2 upstream/DisplayPort 1.4 Alt Mode(power up to 90W)	
Dimension	Size	128 mm x 130 mm x 52mm (L x W x H)	
Power	Standard Port	19V/20V DC-in	
Temperature	Operating Temp.	0°C to 50°C	
	Storage Temp.	-20°C to 70°C	
Cooling		Active	
Operating System		Win10/11 64bit, Linux 64bit	

*All specifications and photos are subject to change without notice.

Dimension

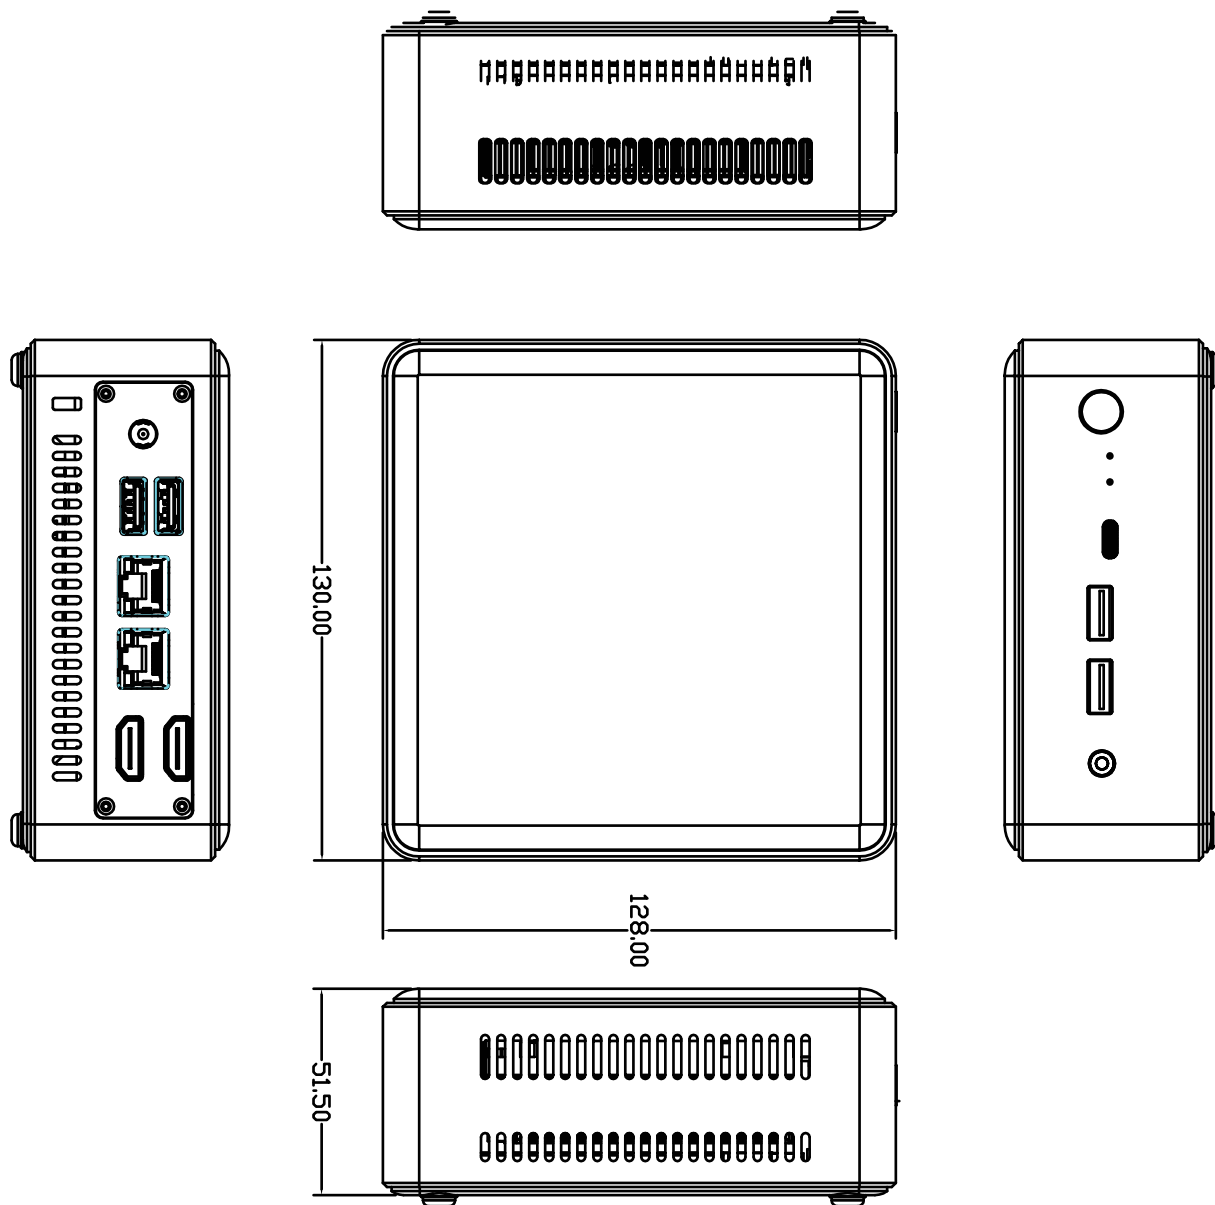

Copyright ©2023 Maxtang Technology Co. Ltd. All rights reserved. All data is for information purposes only and not guaranteed for legal purposes. Information has been carefully checked and is believed to be accurate; however, no responsibility is assumed for inaccuracies. Maxtang and the Maxtang logo and all other trademarks or registered trademarks are the property of their respective owners and are recognized. The terms HDMI, HDMI High Definition Multimedia Interface, HDMI Trade dress, and HDMI Logos are trademarks or registered trademarks of HDMI Licensing Administrator, Inc.